

Loft Ladder

The Keylite Loft Ladder is designed to ensure simple, fast installation. With pre-installed Flick-Fit brackets, allowing installation from below the loft, and with a unique detachable ladder which enables a one-person installation, the Keylite Loft Ladder is designed to make your life easier.


Features

- ▶ **Flick-Fit Brackets** – All Keylite Loft Ladders are manufactured with our unique patented flick fit brackets that are pre-installed to the Loft Ladder frame. These brackets enable an installation from below the loft while also facilitating a one-person installation.
- ▶ **Installation** – Keylite provide all necessary fixtures and fittings required to install our Loft Ladder including two Support Laths. These laths are designed to hold the ladder in place until the installer can safely get in position to complete the installation process.
- ▶ **Detachable Ladder** – The Keylite Loft Ladder can be removed from the trap door to reduce the weight of the overall unit in order to make the installation process as quick and as easy as possible.
- ▶ **Controlled Dismount** – The incredibly durable hinges used between the segments of the loft ladder offer increased safety and peace of mind when opening the trapdoor that the ladder will not drop independently on the person below.
- ▶ **Continuous Seal** – Keylite Loft Ladders have incorporated a continuous seal around the trap door which reduces Heat Loss and improves the overall Air Tightness of the product.
- ▶ **Pre-Fitted Handrail** - Located to the right hand side of the ladder, the handrail offers added safety when using the ladder.
- ▶ **Insulated Trapdoor** – The white 36mm thick Insulated Trapdoor is supplied as standard on all Keylite Loft Ladders and boasts an impressive U-Value of 1.1 W/m²K
- ▶ **Recessed Locking** – Keylite Loft Ladders are provided with a recessed locking system installed within the trapdoor for increased aesthetics and improved safety.
- ▶ **Slip Resistant Treads** - The profile of the rungs on a Keylite Loft Ladder include a series of built in slip resistant treads to offer increased safety and assurance to the user when accessing and egressing the ladder.
- ▶ **Dovetail Joints** - All of the rungs on a Keylite Loft Ladder feature Dovetail joints at the intersect with the Ladder rails for increased tensile strength and allow the maximum weight capacity of the ladder to reach, but not exceed 160Kg.
- ▶ **Protective Feet** – Every one of the Keylite Loft Ladders are provided with a pair of protective feet for the ends of the rails. These protective feet act to combat the scratches to laminate floors and tiles that can occur when the feet are not applied and the exposed timber continually rubs along the surface of the floor.
- ▶ **Air Tightness** – All of the Keylite loft ladders are draught proof and have obtained the highest classification possible on these products, Class 4.
- ▶ **Approved** – Keylite have invested in their products in order to gain the relevant certification and accreditations from national and European bodies. The Keylite Loft Ladder is no different and is fully certified to EN 14975.



Application

- ▶ Keylite recommend installing the Loft Ladder so that the frame bottom is placed flush with the underside of the finished ceiling.
- ▶ When the ladder is fully extended you must ensure that the distance from the frame bottom to the finished floor bottom does not exceed 2.8m on a KYL 01-02, KYL 04-05 and KYL 07-08 and 3.2m on a KYL 03, KYL 06 and KYL 09. Similarly the rear of the ladder must
- ▶ be installed a minimum of 1.65m from any vertical surfaces such as walls and doors.
- ▶ Finally Keylite recommend that the Loft Ladders are not installed close to a stairwell.

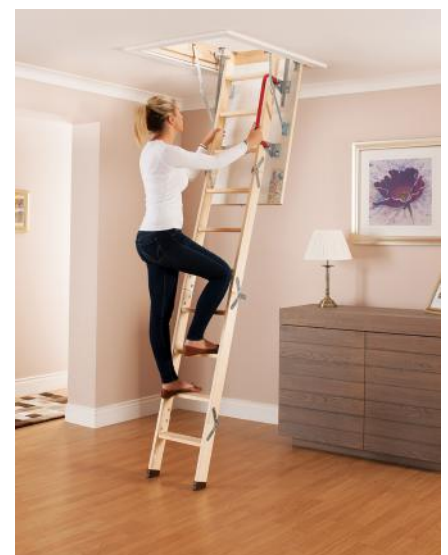


Technical Details

| Keylite Product Code | KYL02 | KYL03 | KYL08 | KYL09 |
|--|------------|------------|------------|------------|
| A Ceiling opening dimension (mm) | 550 x 1200 | 550 x 1200 | 700 x 1200 | 700 x 1200 |
| B Frame external dimension (mm) | 530 x 1140 | 530 x 1140 | 680 x 1140 | 680 x 1140 |
| Number of ladder sections | 3 | 4 | 3 | 4 |
| C Distance from rear of frame to extended ladder rail (mm) | 1025 | 1145 | 1025 | 1145 |
| R Distance from rear of frame to maximum protrusion (mm) | 1565 | 1605 | 1565 | 1605 |
| H Maximum height (mm) | 2800 | 3200 | 2800 | 3200 |

*Please note additional sizes may be available upon request. For further information please contact the Keylite Technical Department.

Cross Sections

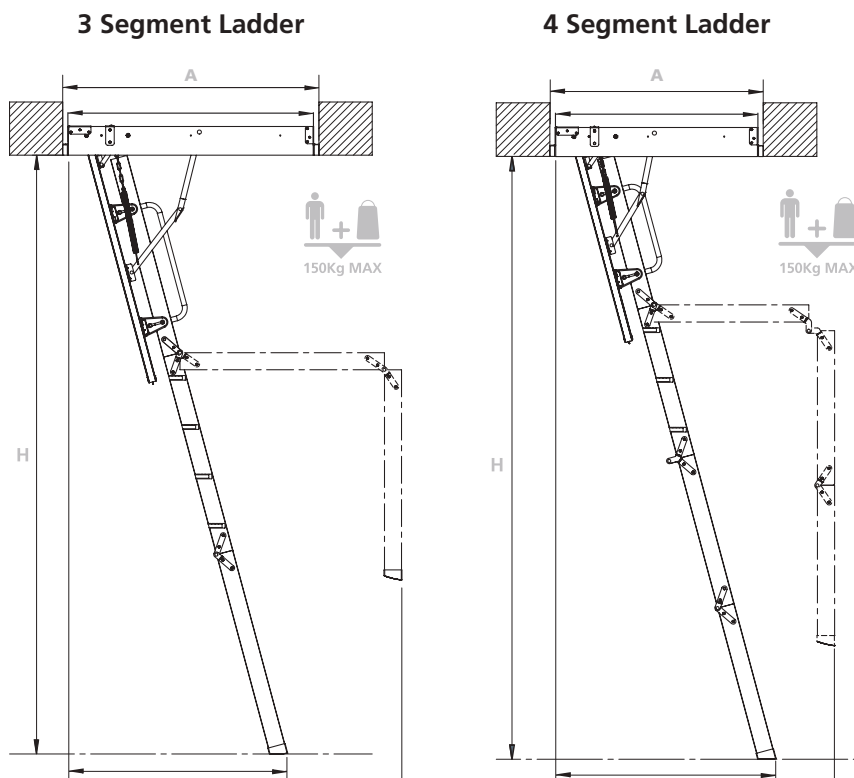

Operation

- ▶ The Keylite Loft Ladder is operated manually as standard by releasing the latch using the opening pole provided, pulling downwards to release and folding the respective segments of the ladder out and in to place.

Guarantee

- ▶ 3 Years - Keylite's hassle free guarantee on Loft Ladders and their components.

Keylite Australian Distribution

New South Wales
 Natural Lighting Products
 Sydney Sales Office
 Unit 1, 28 Vore Street
 Silverwater
 NSW 2128

Queensland
 Natural Lighting Products
 Brisbane Sales Office
 Unit 12, 12-18 Ellerslie Road
 Meadowbrook
 Qld 4131

Victoria
 Natural Lighting Products
 Victorian Sales Office
 Unit 13, 556-598 Princes Hwy
 Noble Park
 Vic 3174

Western Australia
 Calidad Industries
 1/40 Inspiration Drive,
 Wangara
 WA 6065

Customer Service:
1300 SKYLIGHT

Email:
info@keyliteskylights.com.au

keyliteskylights.com.au