


Roof Lantern Surveying Guide

- When specifying the dimensions of your lantern, you should provide the external dimensions of your upstand **and** the fitted water proof membrane
 - We also recommend that you increase the size of the Lantern by 12mm in both length and width which will give you 6mm overhang all round
- Example:**
 Upstand (inc Membrane):
 1840 x 1220mm
-
- Overhang:
 12mm x 12mm
-
- Roof Size:**
 1852 x 1232
-
- Upstand **must** be a minimum of 69mm wide (width of lantern eaves beam), level and square.


It is the responsibility of the installer to determine the finishing detail of the inside.

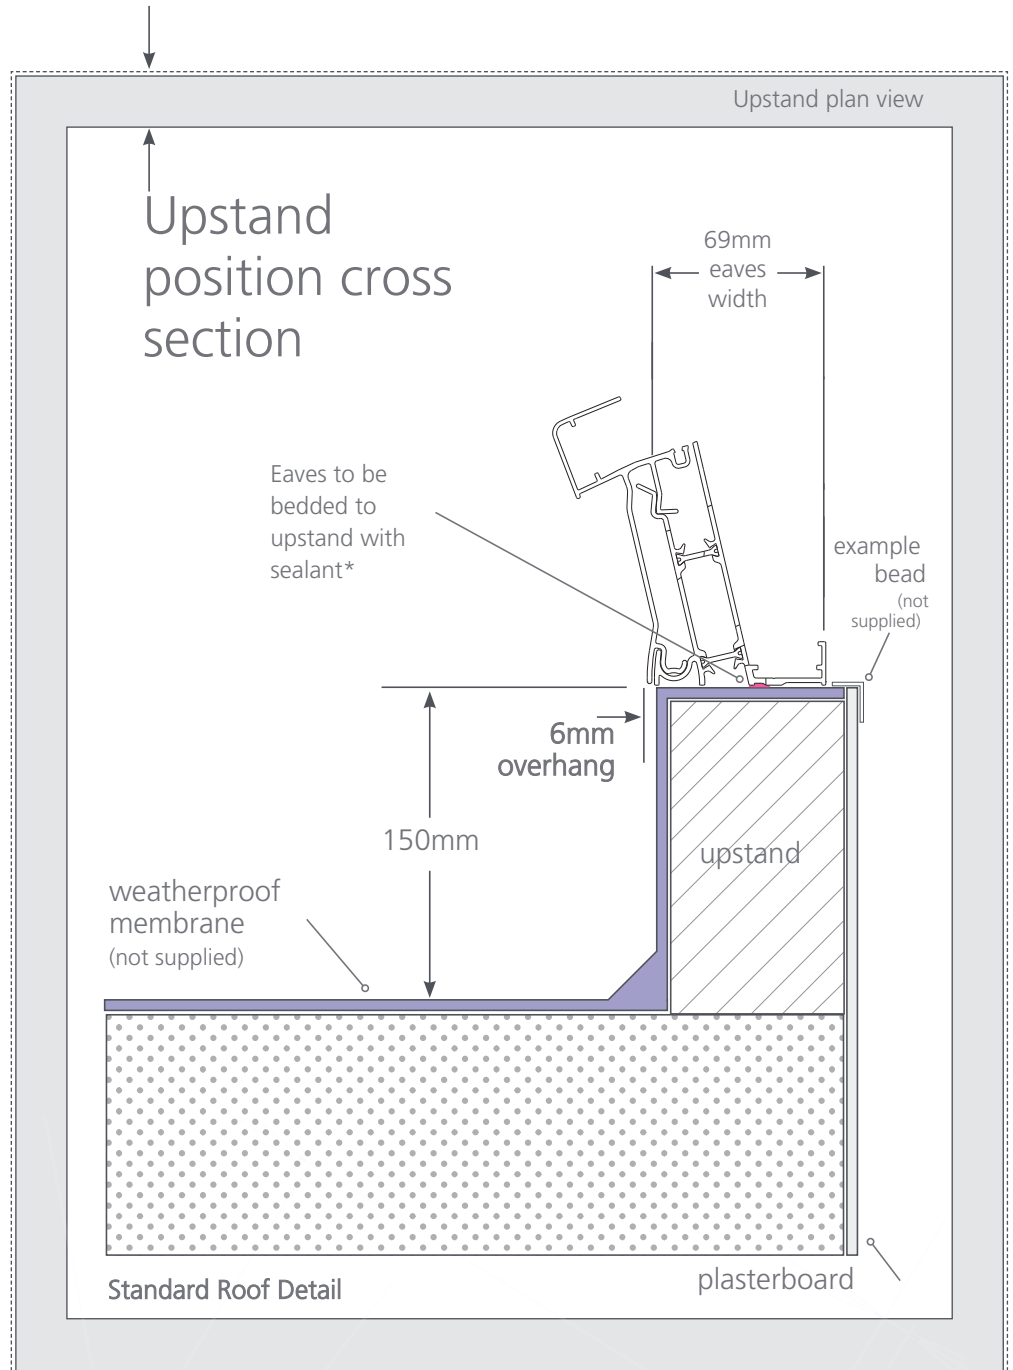

**Sealant to be applied to the underside of the eaves as per installation guide instructions only*

24mm glazing

25 degree fixed pitch

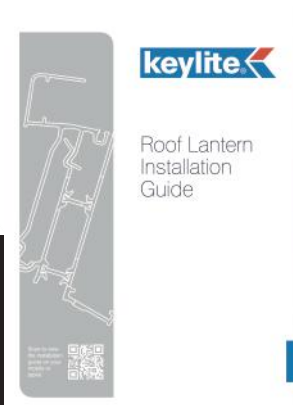

Download the installation guide from keyliterateofwindows.com

UK
 Unit 3 Gateway Road, Burton Gateway,
 Burton upon Trent, DE13 8FL

T: +44 (0) 1283 200 158
 E: info@keyliteuk.com

NI & ROI
 Derryloran Industrial Est. Sandholes Road,
 Cookstown, Co. Tyrone, BT80 9LU

T: +44 (0) 28 8675 8921
 E: info@keylite.co.uk