

# Roof Lantern Surveying Guide

- When specifying the dimensions of your lantern, you should provide the external dimensions of your upstand **and** the fitted water proof membrane

- We also recommend that you increase the size of the Lantern by 12mm in both length and width which will give you 6mm overhang all round

**Example:**


Upstand (inc Membrane):  
1840 x 1220mm

Overhang:  
12mm x 12mm

Roof Size:  
1852 x 1232

- Upstand **must** be a minimum of 69mm wide (width of lantern eaves beam), level and square.


It is the responsibility of the installer to determine the finishing detail of the inside.

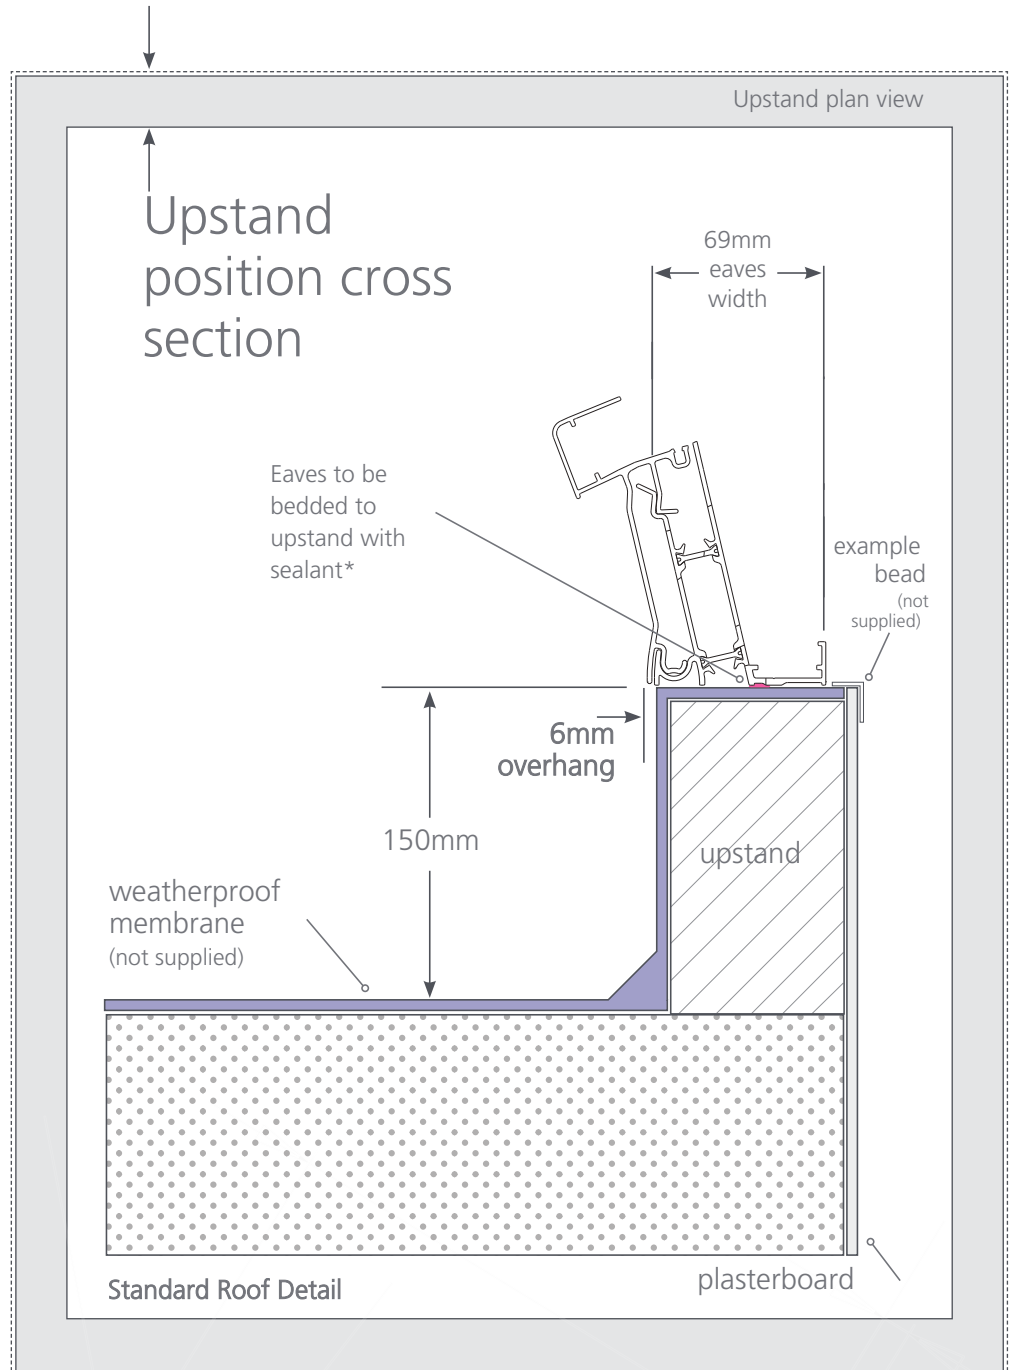

*\*Sealant to be applied to the underside of the eaves as per installation guide instructions only*

24mm glazing

25 degree fixed pitch

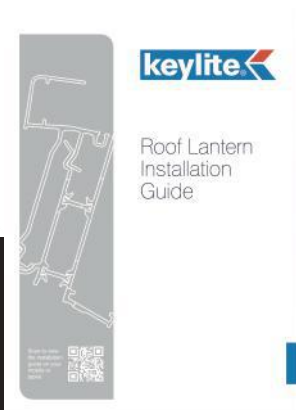

Download the installation guide from [keyliteroofwindows.com](http://keyliteroofwindows.com)

**UK**  
Unit 3 Gateway Road, Burton Gateway,  
Burton upon Trent, DE13 8FL

T: +44 (0) 1283 200 158  
E: [info@keyliteuk.com](mailto:info@keyliteuk.com)

**NI & ROI**  
Derryloran Industrial Est. Sandholes Road,  
Cookstown, Co. Tyrone, BT80 9LU

T: +44 (0) 28 8675 8921  
E: [info@keylite.co.uk](mailto:info@keylite.co.uk)